

Evaluation Board for TEC Controller



Features

Input Characteristics:

- DC Input Voltage: 5 to 12 V

Main Features:

- USB connector to interface the TEC-1092
- Interface for TEC-1092
- ESD protection
- Screw connectors

Special Requirements / More Information:

- Please contact us for additional information or customization.

General Description:

The EVL-1093 is an evaluation board for the TEC-1092 TEC controller and provides easy connectivity for it.

The TEC-1092 is not included with the EVL-1093.

It has exactly the same size and pinout as the TEC-1091. (Except the additional connector X5)

Please refer to the datasheet of the TEC-1092 (document 5208) for more information.

Absolute Maximum Ratings

Supply voltage (DC)	20 V
---------------------	------

Operating Ratings

Temperature	-40 – 90°C
Humidity	5 – 95%, non-condensing

Electrical Characteristics

Unless otherwise noted: $T_A = 25\text{ °C}$, $V_{IN} = 12\text{ V}$


Symbol	Parameter	Test Conditions	Min	Typ	Max	Units
DC Power Supply Input:						
V_{IN}	Supply voltage		4.9		12	V
USB:						
U_{PP}	Electrical isolation				1	kV

RS232 TTL and General Purpose Digital I/O Characteristics (RES1 ... RES8, RX, TX)

Unless otherwise noted: $T_A = 25\text{ °C}$, $U_{IN} = 12\text{ V}$

Symbol	Parameter	Comments	Min	Typ	Max	Units
ESD Protection: (Between TEC-1092 and Connector)						
U_{PP}	ESD discharge	IEC61000-4-2			100	kV
R_A	Series resistance		170	200	230	Ω

Pin Configuration and Mechanical Data

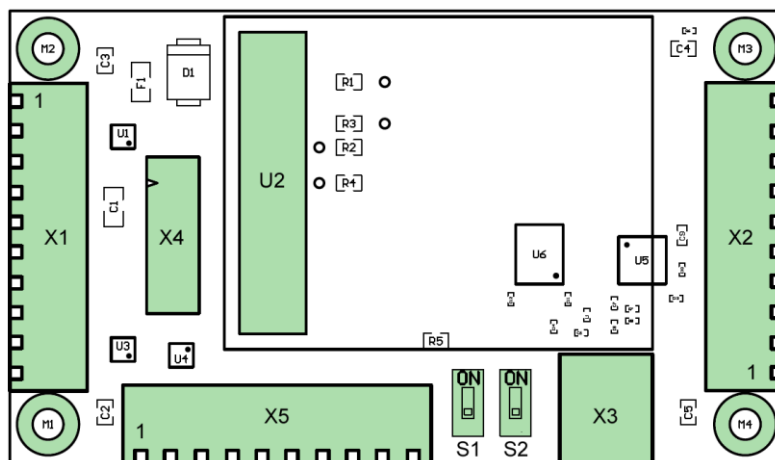

Top view


Pin Description:

X1	1	Power VIN
	2	Power GND
	3	RES1
	4	RES2
	5	RES3
	6	RES4
	7	RS232 TTL RX
	8	RS232 TTL TX
	9	RS485 A2
	10	RS485 B2
X2	1	Object temperature sensor IA
	2	Object temperature sensor IB
	3	Object temperature sensor UA
	4	Object temperature sensor UB
	5	Shield
	6	Sink temperature sensor A
	7	Sink temperature sensor B
	8	GND
	9	Out- (Peltier element minus)
	10	Out+ (Peltier element plus)
X5	1	RES5
	2	RES6
	3	RES7
	4	RES8
	5	NC
	6	NC
	7	NC
	8	NC
	9	3.3 V
	10	5 V
X3	USB mini B	
X4	Status Display Kit DPY-1113 connector	
U2	TEC-1092 connector	

X4	Status Display Kit DPY-1113 connector
U2	TEC-1092 connector
S1	On: 120 Ω RS485 termination enabled
S2	On: USB connectivity enabled Off: RS232 TTL connectivity enabled

Dimensions:

65 mm $\times$ 38 mm $\times$ 14 mm

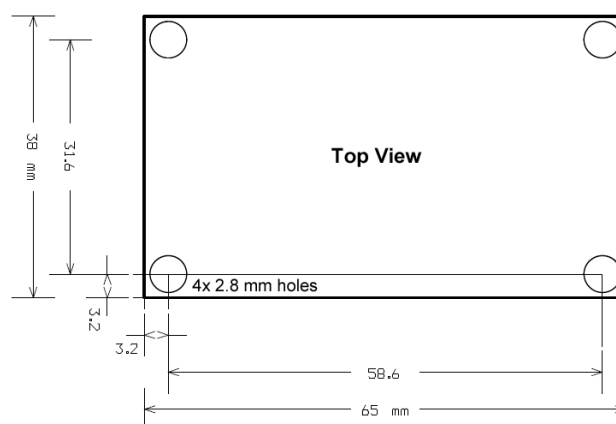


Operation-Modes / Theory of Operation

The EVL-1093 allows the evaluation and simple connection of a TEC-1092 to a host system using USB. Further, a DPY-1113 TEC Status Display Kit can be connected.



Schematic

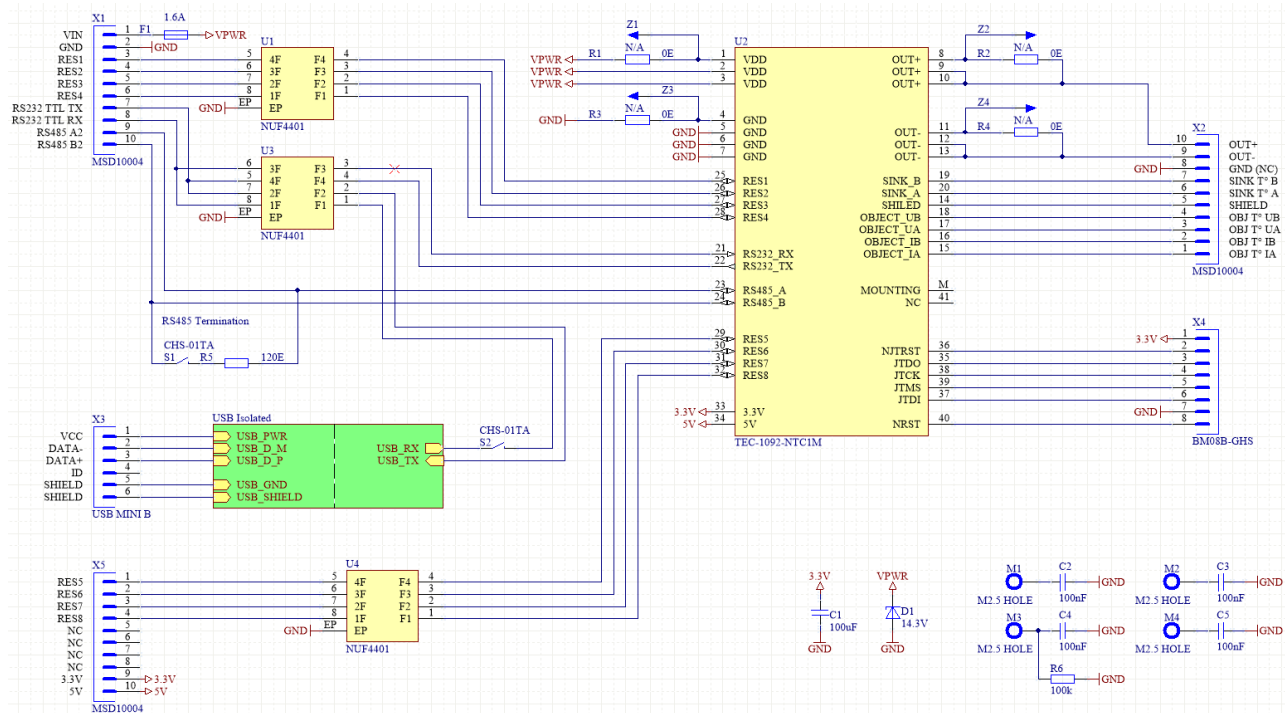

Confidential


EVL-1093
TOP.SchDoc



Meerstetter Engineering GmbH
Schulhausgasse 12
CH-3113 Rübenen
Phone: +41 31 712 01 01

Revision:
Layout: 18
Designed: 7149A
Modified: 16.09.16 ML
00.00.00 YZ

4147A
1 / 2

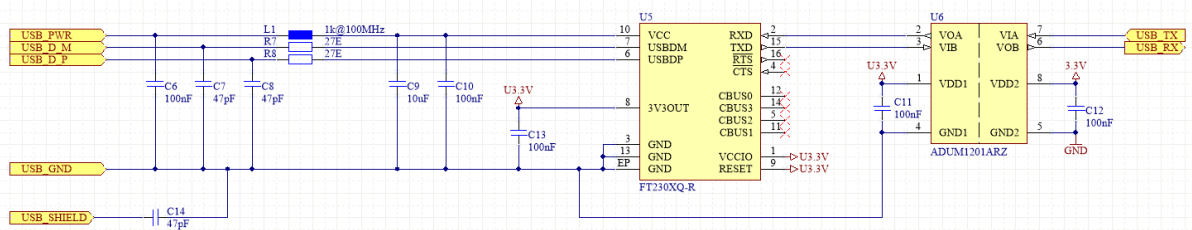

Confidential

EVL-1093
USB.SchDoc



Meerstetter Engineering GmbH
Schulhausgasse 12
CH-3113 Rübenen
Phone: +41 31 712 01 01

Revision:
Layout: 12
Designed: 7149A
Modified: 16.09.16 ML
00.00.00 YZ


4147A
2 / 2

Please contact Meerstetter Engineering if you need the whole Altium Project inclusive layout.

EVL-1093 Ordering Information, Hardware Configuration

Example Configuration:

EVL-1093 - SCREW

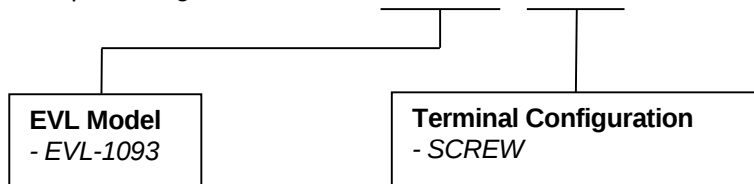

Display Unit:

It is possible to connect an OLED Display 2x16 char directly to X4 of the EVL-1093. Please visit the DPY-1113 product web page for further information.

Customization:

Many hardware and software features of the TEC-1092 are customizable upon request. Please contact Meerstetter Engineering with your enquiry.

Meerstetter Engineering GmbH
Schulhausgasse 12
3113 Rubigen, Switzerland



Phone: +41 31 712 01 01
Email: contact@meerstetter.ch
Website: www.meerstetter.ch

Meerstetter Engineering GmbH (ME) reserves the right to make changes without further notice to the product described herein. Information furnished by ME is believed to be accurate and reliable. However typical parameters can vary depending on the application and actual performance may vary over time. All operating parameters must be validated by the customer under actual application conditions.